(19) World Intellectual Property **Organization** International Bureau





(43) International Publication Date 4 August 2005 (04.08.2005)

PCT

(10) International Publication Number WO 2005/070712 A2

(51) International Patent Classification7:

B60H 1/00

(21) International Application Number:

PCT/JP2004/019271

(22) International Filing Date:

16 December 2004 (16.12.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 2004-014200

22 January 2004 (22.01.2004)

- (71) Applicant (for all designated States except US): CAL-SONIC KANSEI CORPORATION [JP/JP]; 24-15, Minamidai 5-chome, Nakano-ku, Tokyo 1648602 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): NAKAMURA, Kojiro. MARUYAMA, Tomohiro.
- (74) Agents: MIYOSHI, Hideknzu et al.; Toranomon Kotohira Tower, 2-8, Toranomon 1-chome, Minato-ku, Tokyo 105-0001 (JP).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GII, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: METIIOD AND DEVICE FOR CONTROLLING REFRIGERATION CYCLE OF AIR CONDITIONING SYSTEM FOR VEHICLE

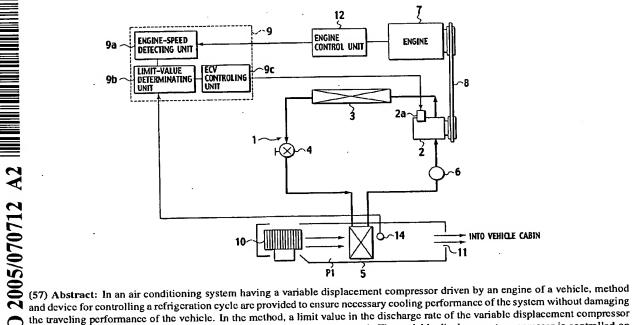

the traveling performance of the vehicle. In the method, a limit value in the discharge rate of the variable displacement compressor is determined by an engine speed or a variable related to the engine speed. The variable displacement compressor is controlled on the basis of the limit value.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.